

TYPES

CC134/5m, 134/15m, 134/60m, 134/120m (SPCO)

CC136.2/6hr, 136.2/12hr, 136.2/24hr (SPCO)

CC136.2.1/6hr, 136.2.1/12hr, 136.2.1/24hr (2NO)

FEATURES

- No supply voltage required
- Clockwork spring driven
- Easy screw fixing
- Rugged construction
- Ideal for BMS override applications

APPLICATIONS

This simple but rugged timer is an ideal override unit for HVAC systems. For example, "caretaker" override to a BMS system in schools, public buildings etc. Also ideal for simple process control applications, including bakery equipment, oven controls and mixing systems.

DESCRIPTION

Mechanical plant extension timers, also known as "override timers" or "caretaker timers". Totally mechanically driven by a clockwork spring, therefore no auxiliary supply is required.

The moment the setting knob is turned passed zero to the set time required, the output contact/s switch, the timer will then start running back to zero. When zero is reached the output contact/s will switch back. If after the initial time has been set, it is required that the set time, or remaining time needs to be lengthened, shortened or cancelled back to zero, the knob can be turned without harming the mechanical mechanism.



The timers benefit from 16 Amp / 250V contacts and is easily fitted to the front of a control panel via screw fixings.

SPECIFICATIONS

Movement:	Spring clockwork
Run down times:	CC134/ 5, 15, 60, 120 mins CC136.2/ 6, 12, 24 hours CC136.2.1/ 6, 12, 24 hours
Fixing:	Via two screws 3.5 x 8mm CC134 SPCO
Output:	CC136.2
Contact rating:	CC136.2.1 2NO
Connections:	16 Amps / 250V
Operating temp:	Via 6.3 x 0.8mm fast on terminals -10oC to +70oC
CE marked:	Yes



DIMENSIONS & CONNECTIONS

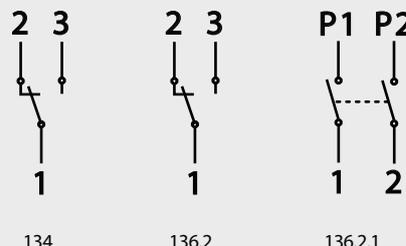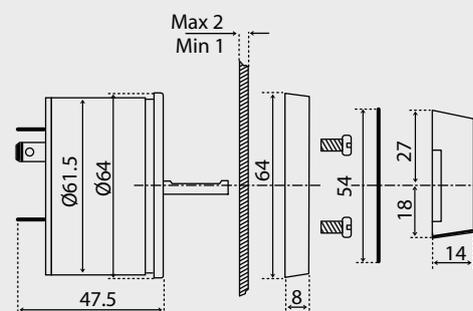

134

136.2

136.2.1

ORDERING INFORMATION

TYPE	TIME RANGE	OUTPUT
CC134/*	5m, 15m, 60m, 120m	SPCO
CC136.2/*	6hr, 12hr, 24hr	SPCO
CC136.2.1/*	6hr, 12hr, 24hr	2NO

*Specify time range

